

WINTEC


Smart POS, Smarter Retail

ID AUTOMATION

Anypos500



Shopping
Mall




Boutique



Supermarket



High performance &
High efficiency

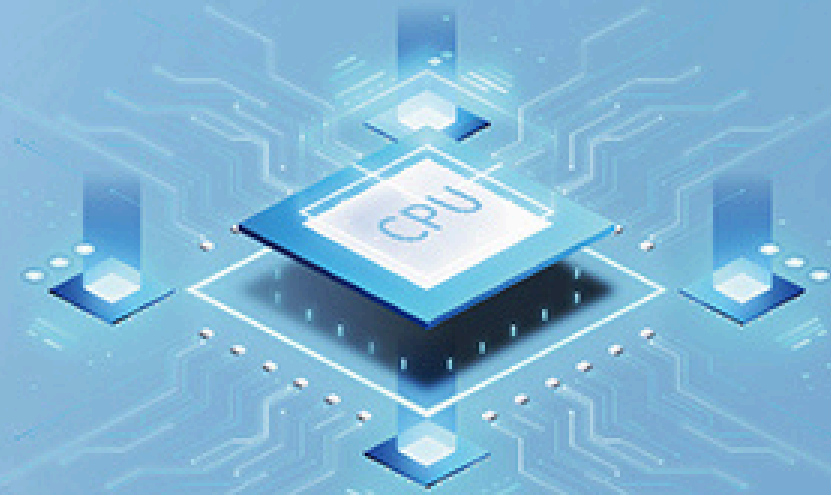

Foldable base design

Dual Signature Hinge design
allows for adjustable height
and viewing angle



Multiple screen sizes for
different scenarios and
applications

Main display: 15"/21.5"
2nd display: 11.6"



Cast aluminum body,
fanless design, stable
and reliable



Anti-glare display



Optional I/O hub
for more interface
extensions



Anypos500 Specification



CPU

J6412 Quad Core 2.0GHz
i3-1115G4 Dual Core 3.0GHz
i5-1135G7 Quad Core 2.4GHz



Memory

4GB, up to 32GB



Storage

128GB, up to 512GB



Ethernet

1*10/100/1000M



Main Display

15" LCD, 1024*768 (PCAP, Anti Glare)
21.5" LCD, 1920*1080 (PCAP, Anti Glare)



2nd Display (Optional)

11.6" LCD, 1366*768
(PCAP optional)



WiFi&BT (Optional)

802.11 b/g/n/ac + BT4.2



Interfaces

4*USB, 2*RS232(RJ48), 1*RJ45, 1*DK, 1*24V IN, 1*HDMI,
1*Type-C(24V), 1*Type-C(DP)



Speaker

2*3W Speaker



OS

Win10,
Linux (V20.4 and above)



Power Adapter

AC Input 100~240V, 50-60Hz
DC Output 24V/2.5A



Dimension

15": 380*230*350 (mm)
21.5": 510*210*380 (mm)



Options

MSR, I/O Box, iButton,
RFID